


LTOP 601MT



TECHNICAL SPECIFICATIONS

Operation	Controlled or control-free entrance / exit in both directions.	Emergency Mode	Unit switches into "emergency mode" with the signal received from the fire detection system in cases of emergency, openings wings to allow passage; with the optional battery supply, the wings automatically open during a power cut, allowing passage.
Chassis	AISI 304 quality stainless steel, oval nose		
Wings	Angular polyurethane winged (other options can be used)	Safety Level Setting	With four custom-defined safety levels, the unit can be set up to prevent and/ or notify trespassing, reverse passage and unauthorized passages of any kind by means of an audio or stealth warning. With interior hand terminal, trouble shooting and configuration settings can easily be made.
Upper Table	AISI 304 quality stainless steel		
Functions	Works bidirectionally and allows the passage of a single person only with its microprocessor control, Electronic passage memory feature saves in memory card swipes that occur before passage is completed and allows them to pass without closing the wings.	Speed of the Wing Operation	Between 0,6- 0,8 seconds.
Mechanism	With its adjustable mechanical torque control, the unit does not cause injury in the event of any jamming.	Indicator	3 coloured indicators for both directions.
Motor	Brushless DC Motor.	Operating Voltage	220 VAC, 60Hz
Sensors	Each turnstile has 16 set of photo- electric sensors.	Power Consumption	50 W during passages, 10W during stand-by
Communication	2 validator connection with RS232 port. With RS485 port all the turnstiles can be controlled from one center.	Operating Temperature	-10 C / +50 C
		Security Level	Deterrent
		Areas of Use	Suitable for indoor use.

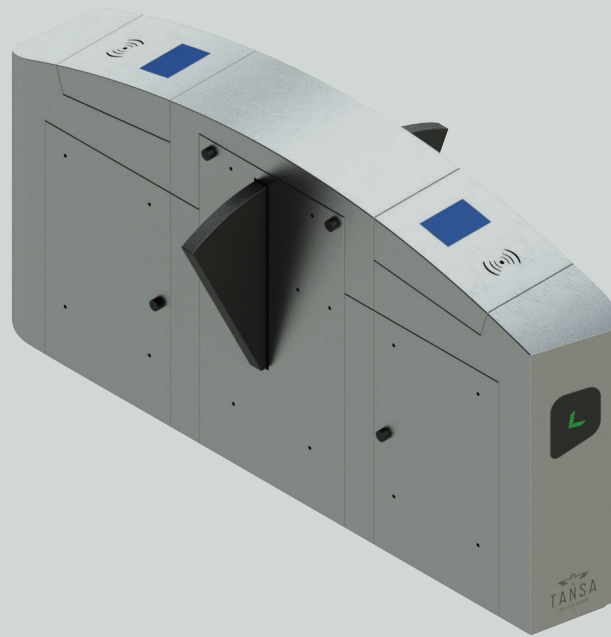